



**LED** **PRODUCT**  
**CATALOG**



**BRITELITE**  
**SOLUTIONS**



## About Us

BriteLite LED Solutions is a complete LED lighting solutions company that offers a broad spectrum of high quality LED lighting products. Our primary goal is to provide the highest quality and innovative energy efficient lighting technologies to our customers.

Our products provide maximum benefit through reduced energy consumption, improved lighting performance, and a reduction in maintenance and material replacement cost. With over 20 years of combined experience in the lighting and energy efficiency industry, our team has the expertise and knowledge to provide valuable, cost effective solutions for all lighting needs. What truly sets us apart isn't just the excellent customer service, it's the combination of a simple buying experience and competitive market pricing. BriteLite LED has partnered up with various utility providers throughout the country to help customers reduce their investment by offering instant rebates on our products. Your satisfaction is guaranteed.

A19  
Candelabra - BA11  
BR30  
Globe - G25  
PAR 20  
PAR 30  
PAR 38

PRODUCTS



## BriteLite LED A19 DIMMABLE

Model No.	Voltage (V)	Wattage (W)	Lumens (lm)	Beam Angle	Incandescent Replacement (W)	Power Factor	CRI	CCT (K)	Life (Hrs.)	Socket	Dimensions (mm)	Dimmable
BLSO06A19930D	120	9	800	270	60	>0.7	≥80	3000	25,000	E26 GU24	60*122	Yes
BLSO06A19940D								4000				
BLSO06A19950D								5000				



# BA11 DIMMABLE

Model No.	Voltage (V)	Wattage (W)	Lumens (lm)	Beam Angle	Incandescent Replacement (W)	Power Factor	CRI	CCT (K)	Life (Hrs.)	Socket	Dimensions (mm)	Dimmable
BLSO5BA11527D	120	7	315	250	40	>0.8	≥80	2700	25,000	E26	35*100/119	Yes
BLSO5BA11540D								4000				
BLSO5BA11550D								5000				




BriteLite LED

# BA11 DIMMABLE

Model No.	Voltage (V)	Wattage (W)	Lumens (lm)	Beam Angle	Incandescent Replacement (W)	Power Factor	CRI	CCT (K)	Life (Hrs.)	Socket	Dimensions (mm)	Dimmable
BLSO5BA11527D	120	7	315	250	40	>0.8	≥80	2700	25,000	E12	35*100/119	Yes
BLSO5BA11540D								4000				
BLSO5BA11550D								5000				



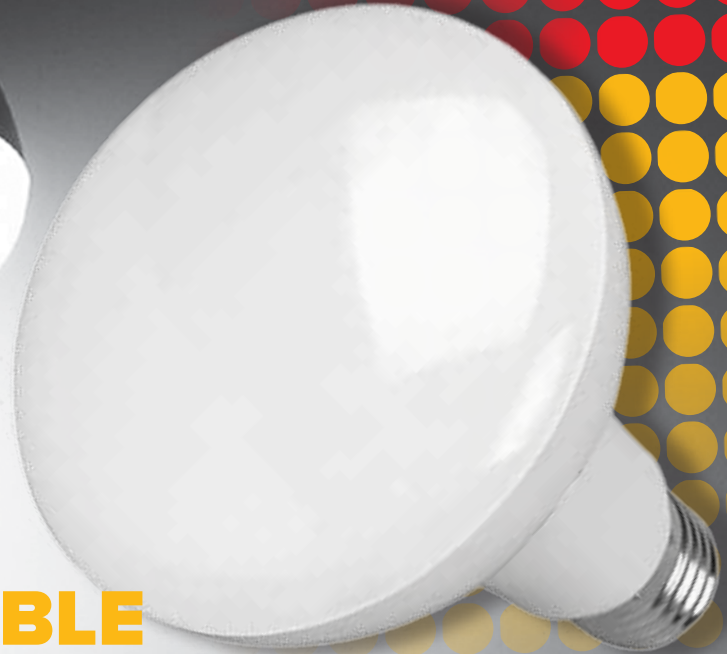

## **BriteLite LED BR30 DIMMABLE**

Model No.	Voltage (V)	Wattage (W)	Lumens (lm)	Beam Angle	Incandescent Replacement (W)	Power Factor	CRI	CCT (K)	Life (Hrs.)	Socket	Dimensions (mm)	Dimmable
BLSO5BR31230D	120	12	800	110	65	>0.9	≥90	3000	25,000	E26	95*135	Yes
BLSO5BR31240D								4000				
BLSO5BR31250D								5000				

BriteLite LED

# G25 DIMMABLE

Model No.	Voltage (V)	Wattage (W)	Lumens (lm)	Beam Angle	Incandescent Replacement (W)	Power Factor	CRI	CCT (K)	Life (Hrs.)	Socket	Dimensions (mm)	Dimmable
BLSO2G25730D	120	7	500	250	60	>0.8	≥80	3000	25,000	E26	79*120	Yes
BLSO2G25740D								4000				
BLSO2G25750D								5000				







**BriteLite LED**


# PAR20 DIMMABLE

Model No.	Voltage (V)	Wattage (W)	Lumens (lm)	Beam Angle	Incandescent Replacement (W)	Power Factor	CRI	CCT (K)	Life (Hrs.)	Socket	Dimensions (mm)	Dimmable
BLSO05P20730D	120	7	470	25	50	>0.9	≥90	3000	25,000	E26/ GU24	63*86/ 63*83	Yes
BLSO05P20740D								4000				
BLSO05P20750D								5000				



# PAR30 DIMMABLE

Model No.	Voltage (V)	Wattage (W)	Lumens (lm)	Beam Angle	Incandescent Replacement (W)	Power Factor	CRI	CCT (K)	Life (Hrs.)	Socket	Dimensions (mm)	Dimmable
BLSO5P301030D	120	10	800	40	75	>0.9	≥90	3000	25,000	E26	95*117	Yes
BLSO5P301040D								4000				
BLSO5P301050D								5000				

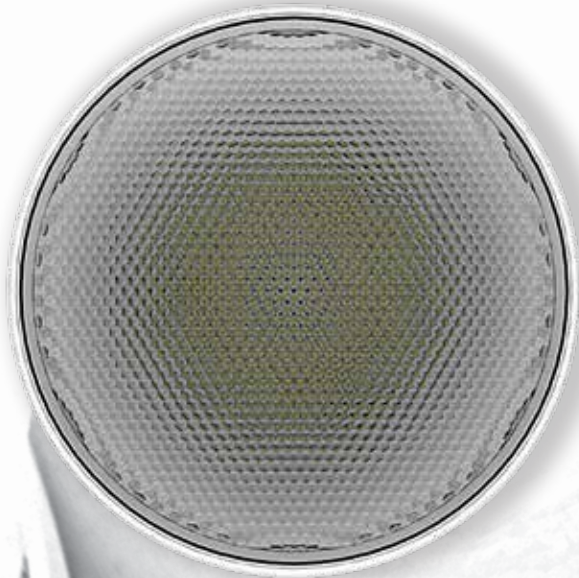



**BriteLite LED**

# PAR38 DIMMABLE

Model No.	Voltage (V)	Wattage (W)	Lumens (lm)	Beam Angle	Incandescent Replacement (W)	Power Factor	CRI	CCT (K)	Life (Hrs.)	Socket	Dimensions (mm)	Dimmable
BLSO5P381730D	120	17	1200	40	120	>0.9	≥90	3000	25,000	E26	120*129	Yes
BLSO5P381740D								4000				
BLSO5P381750D								5000				



311 N. Walnut Ave.  
Wood Dale, IL 60191  
1-888-44BRITE

[www.britelitesolutions.com](http://www.britelitesolutions.com)